


WHERE IS THE FAULT?



EFL 10P FAULT LOCATOR BRIDGE GIVES THE ANSWER

	FEATURES The EFL 10P is a small-size instrument intended for fast and very precise localization of faults in power cables with large conductor diameters. <u>Loop resistance range: from 0.5 to 1000 ohms</u> The processor-controlled automatic measuring bridge of EFL10P provides useful tools. Fault location: <ul style="list-style-type: none"> • Murray Method • 3 Point Method • Küpfmüller Method • Interruption Measurement of cable parameters: <ul style="list-style-type: none"> • Loop resistance • Resistance difference • Insulation resistance • Capacitance • Capacitive balance • Voltage Quick repeated DMM measurements USB port and WIFI for data transfer
--	--

FAULT LOCATION METHODS

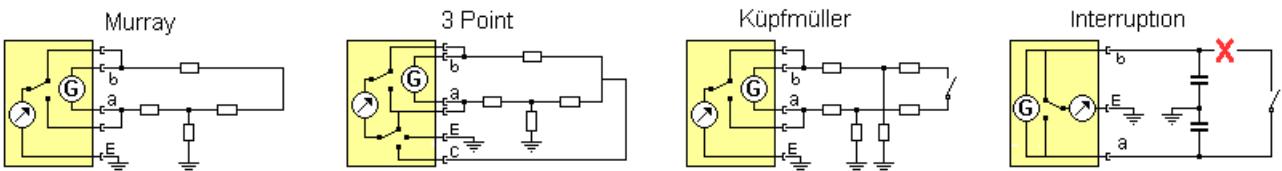

SPECIFICATIONS OF FAULT LOCATION AND CABLE PARAMETER MEASUREMENTS

Insulation Fault Location

Measuring methodsMurray, 3 Point, Küpfmüller
Loop resistance range0.5 Ω to 1000 Ω
Fault resistance rangeup to 50 MΩ
Measuring voltage.....1 V DC or AC
Accuracy of Lx/L value (R I = 2 Ω, Lx/L=0.1 to 1)
 Fault resistance < 1 MΩ±0.2%
 Fault resistance 1 MΩ to 5 MΩ±0.3%
 Fault resistance 5 MΩ to 25 MΩ.....±0.5%
 Fault resistance 25 MΩ to 50 MΩ.....±2%

Interruption Location

Measuring range..... up to 20 km
Measuring voltage
 For Lx/L measurement..... 1 V AC
 For capacitance measurement100 V AC
Accuracy±2% ±0.2 nF
Test resultsLx/L, Ca-E, Cb-E

Disturbing Voltages

Measuring range
DC voltage..... up to 400 V
AC voltage.....up to 250 V rms
Frequency range.....15 to 300 Hz
Input resistance1 MΩ
Accuracy±3% ±1 V

Capacitance

Measuring range1 nF to 10 μF
Measuring voltage11 Hz, 100 V
Accuracy (10 nF to 10 μF)±2% ±0.2 nF

Loop Resistance

Measuring range0.5 Ω to 1000 Ω
Measuring voltage1 V
Accuracy±0.3% ±0.03 Ω

Resistance Difference

Loop resistance range10 to 5000 Ω
Resolution.....1/1000
Accuracy.....±0.2% of loop resistance ±0.02 Ω

Capacitive Balance

Measuring range1 nF to 2 μF
Measuring voltage11 Hz, 100 V
Accuracy±2 % ± 0.2 nF

Insulation Resistance

Quick measurement10 kΩ to 300 MΩ
Quality measurementup to 10 GΩ
Measuring voltage100 / 250 V
Accuracy
 10 kΩ to 50 MΩ5 % ± 1 kΩ
 50 MΩ to 100 MΩ10 %
 100 MΩ to 5 GΩ20 %
 5 GΩ to 10 GΩ30 %

SPECIFICATIONS OF DMM MEASUREMENTS

Disturbing Voltages	Insulation Resistance
Measuring range	Measuring range 10 kΩ to 1000 MΩ
DC voltage up to 400 V	Measuring mode Repeated measurements
AC voltage up to 250 V eff	Measuring voltage 100 V
Measuring mode Repeated measurements	DC disturbing voltage compensation Disabled
Frequency range 15 to 300 Hz	Measuring time ~ 3 sec
Input resistance 1 MΩ	Accuracy (without disturbing voltages)
Accuracy ±3% ±1 V	10 kΩ to 300 MΩ 20 %
Test results AC, DC voltage between wire a and b	Test result Resistance between wire a and wire b
Capacitance	Loop Resistance
Measuring range 10 nF to 2 µF	Measuring range 1Ω to 10 kΩ
Measuring mode Repeated measurements	Measuring mode Repeated measurements
Measuring voltage 11 Hz, 100 V	DC disturbing voltage compensation Disabled
Accuracy ±3% ±0.3 nF	Accuracy (without disturbing voltages) ±0.5% ±0.2 Ω
Test result ... Capacitance between wire a and wire b	Test result Resistance between wire a and wire b

DATA TRANSFER

Data transfer via USB port:	Data transfer via WiFi
<ul style="list-style-type: none"> transfer of results and setups to USB stick bidirectional transfer of setups transfer of print screen images to USB stick transfer of upgrade files to EFL 10P 	EFL 10P acts as a HTTP server when transfers test results to Local Area Network.

GENERAL SPECIFICATIONS

Power supply	Ambient temperature ranges
Internal rechargeable lithium-ion battery pack	Reference +23°C ± 5°C, RH 45% to 75% *
Operation time ca. 8 hours	Normal operation 0°C to +40°C, RH 30% to 75% *(< 25 g/m³)
Charging	Limits of operation -5°C to +45°C, RH 5% to 95% *(< 29g/m³)
From 230 V mains with mains adapter	Storage and transport -20°C to +70°C, RH 95% at +45°C (< 35 g/m³)
From 12 V car battery with car adapter (option)	Protection IP 54
Charging time approx. 3 hours	Shockproof EN 60068-2-27 Shock
Display 320x240 dot color TFT LCD	Dimensions 200 x 100 x 40 mm
Connectors	Weight 0.8 kg
For mains or 12V car adapter 2.1/5.5 mm socket	* without condensation
For measuring cables 6 pcs of 4 mm safety banana sockets	
Micro-USB to connect PC or memory stick	

ORDERING INFORMATION

FAULT LOCATOR BRIDGE	
EFL 10P 471-000-000
Including:	
Operating Manual	
Application guide	
Calibration Certificate	
Ground cable (green)	
Test lead (yellow)	
2 wire test lead with crocodile clamp (red)	
2 wire test lead with crocodile clamp (black)	
USB stick	
OTG cable	
USB cable for PC connection	
Mains adapter	
Battery pack (built-in)	
Carrying case	
HW Option:	
Car Lighter power adapter EAA 20..... 462-000-000	

ELEKTRONIKA reserves the right to change specifications without prior notice !

16.10.2021